

LED Underground Light/LED Up Light

with stainless steel face cover



Asymmetrical lens




824181/824182/824183/824184/824186

824181AS/824182AS/824183AS
824184AS/824186AS

Outer Dimensions: Unit:mm

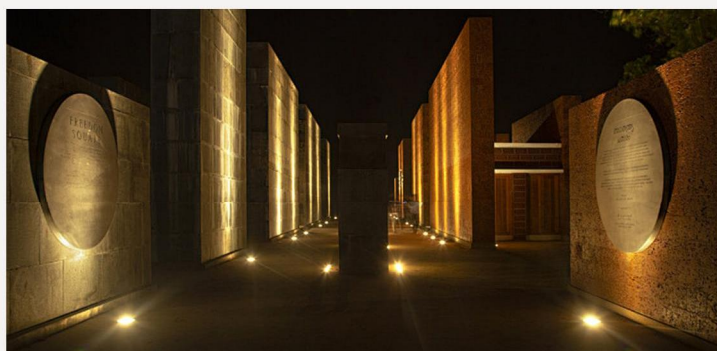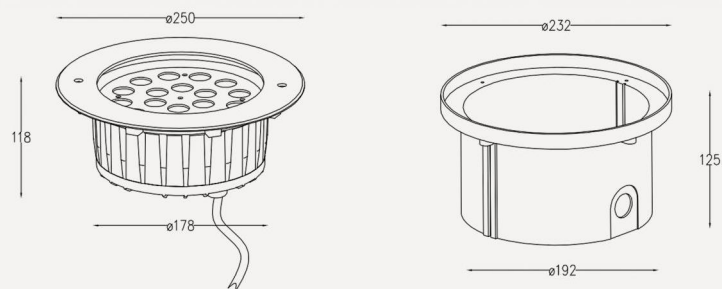

Asymmetrical lens

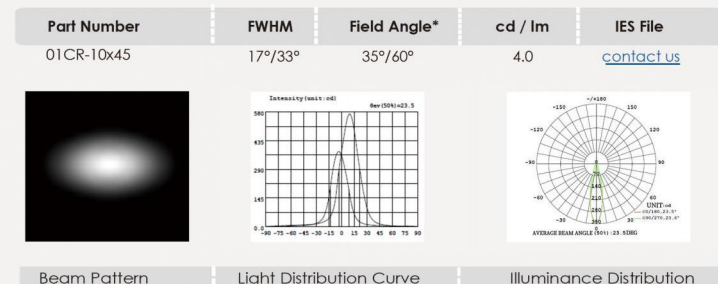

Material specifications

Housing:	Outdoor dark grey powder coated aluminum T=60-80um Adhesion of ISO class 1 / ASTM class 4B
Front cover:	304# or 316# Stainless Steel
Lens:	Optical lens, efficiency ≥ 85%
Glass:	Tempered step glass T=8mm
Glass pressure capacity:	Full area 2250kgs
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C ~ 40°C
Power cable:	H05RN-F 2×0.75mm² L=0.5m (low voltage) H05RN-F 3×0.75mm² L=0.5m (for single color/high voltage) H05RN-F 4×0.75mm² L=0.5m (for RGB)
Mounting sleeve:	ABS

*Note:

- Item No. with "H" stands for "input voltage AC100-240V"
- Item No. with "AS" stands for "Asymmetrical lens"
- Any special customization, to be confirmed with us

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	lk rate
824181(S/H/AS)	18x1W LED	8°/15°/25°/30°/45°/60°	19.2	DC24V/AC100-240V	8
824182(S/H/AS)	18x2W LED	8°/15°/25°/30°/45°/60°	37	DC24V/AC100-240V	8
824183(S/AS)	18x1W RGB LED	8°/15°/25°/30°/45°/60°	18	DC24V	8
824184(S/AS)	18x2W RGB LED	8°/15°/25°/30°/45°/60°	40	DC24V	8
824186(S/AS)	18x3W RGB3in1 LED	25°/30°/45°/60°	54	DC24V	8